

Hydrogen Sulfide Gas Sensor

Product Data Sheet
Model #SS4198

2025. Ver 1.0

Applications & Features


- Ideal for portable and fixed instrument
- Industrial safety (petrochemical, refineries)
- Sewers, wastewater treatment
- Mining



Specifications

Performance Characteristics	
Output Signal	380±80 nA / ppm
Typical Baseline Range (pure air, @ 20°C)	±1 ppm H ₂ S equivalent
Response Time (T90)	< 35 seconds
Filter	None
Measurement Range	0-200 ppm
Maximum Overload	1,000 ppm
Linearity	Linear
Repeatability	< ±2 ppm H ₂ S equivalent
Recommended Load Resistor	10 ohms
Resolution (Electronics Dependent)	< 0.1 ppm typical
Bias Voltage	0 mV
Environmental	
Temperature Range Continuous	-20°C to +50°C
Pressure Range	800 to 1200 mbar
Operating Humidity Range	15% to 90% RH
Lifetime	
Long Term Output Drift	< 5% per annum
Recommended Storage Temp	0°C to 20°C
Expected Operating Life	> 24 months in air
Standard Warranty	24 months from date of dispatch
Intrinsic Safety Data	
Maximum at 1,000 ppm	40 mA
Maximum o/c Voltage	< 1.0 V
Maximum s/c Current	< 0.1 A

Dimension

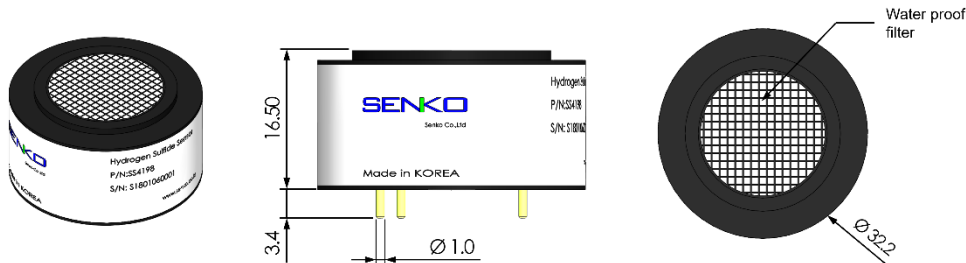


Due to ongoing research and product improvement, specifications are subject to change without notice.

Hydrogen Sulfide Gas Sensor

Product Data Sheet
Model #SS4198

2025. Ver 1.0


Temperature Effects

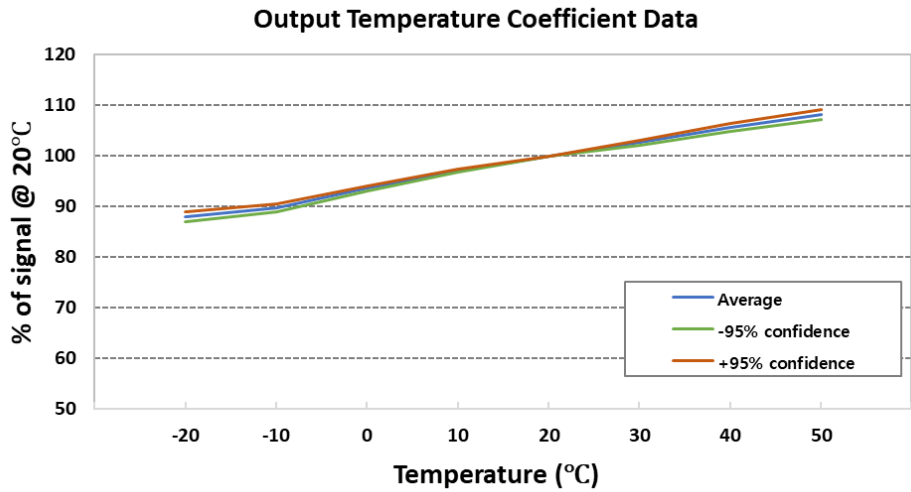

Cross Sensitivity

Gas	Concentration [ppm]	Reading [ppm]
Hydrogen Sulfide	50	50
Carbon Monoxide	300	< 3
Hydrogen	10,000	< 5
Sulfur Dioxide	5	0
Nitric Oxide	35	0
Nitrogen Dioxide	5	< -1.5

Standard Operating Circuit

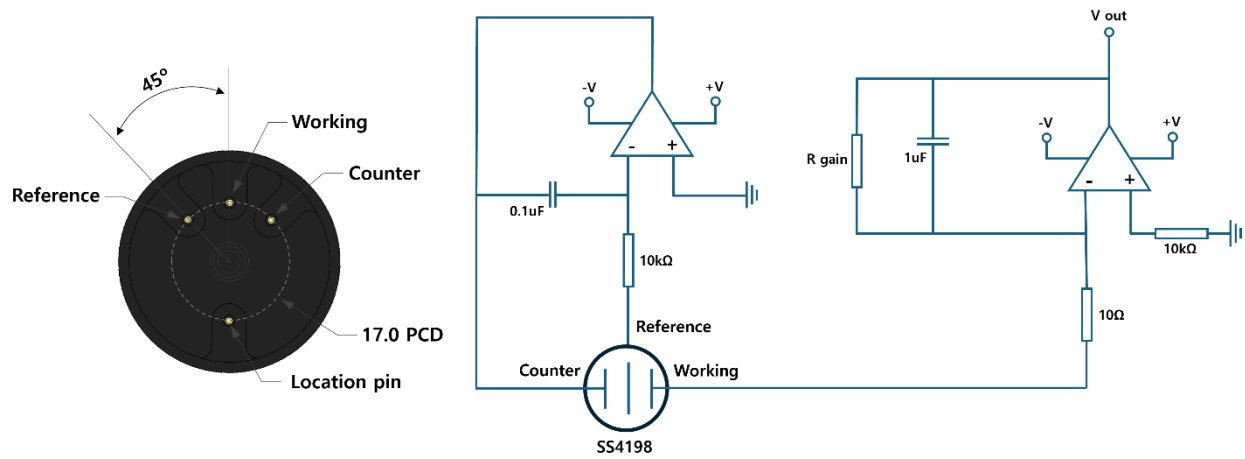

Due to ongoing research and product improvement, specifications are subject to change without notice.